
SIIT ITS 323

ITS 323 – QUIZ 1 EXTRA (IT)

First name:	Last name:		
ID:	Total Ma	Total Marks:	
		out of 5	

Question 1 [3.5 marks]

Consider the network shown below in which two cable links are used to connect A to B (via C).

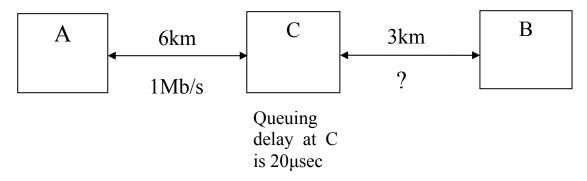

If a message of size 100 bits has to be sent from A to B with a maximum delay of 175/200/250usec, then

what is the minimum data rate required over the second link?

You can assume the transmission velocity is 3×10^8 m/s for each cable. Also assume there are no processing delays at any node, and no queuing delay at nodes A or B.

Question 2 [1.5 marks]

Multiple choice questions – circle the most accurate answer (one answer only per question).

A web browser, such as Firefox or Internet Explorer:

- a) Only implements the Application layer and Transport layer of the TCP/IP stack
- b) Normally implements all layers in the TCP/IP stack
- c) Only implements the Application layer of the TCP/IP stack
- d) Normally implements all layers in the OSI 7-layer stack
- e) Implements the Internet Protocol (IP) from the TCP/IP stack
- f) Implements the Transport and Network layers of the TCP/IP stack

The address 192.168.1.3 is an example of a:

a) Transport layer address

SIIT ITS 323

- b) Port address
- c) Logical address
- d) Hardware address
- e) MAC address
- f) Network address

If a protocol adds a 20 byte header to a message, and the original message size is 60 bytes, then:

- a) The efficiency of the protocol is 75%
- b) The efficiency of the protocol is 60%
- c) The efficiency of the protocol is 80%
- d) The efficiency of the protocol is 20%
- e) The efficiency of the protocol is 25%
- f) The throughput of the protocol would be 0.6Mb/s if the data rate was 1Mb/s
- g) The throughput of the protocol would be 0.8Mb/s if the data rate was 1Mb/s
- h) The throughput of the protocol would be 0.2Mb/s if the data rate was 1Mb/s