SIIT ITS 323

# ITS 323 – QUIZ 2


First name: \_\_\_\_\_ Last name: \_\_\_\_\_

ID:

Total Marks: \_\_\_\_\_ out of 10

### **Question 1** [3 marks]

Below is a frequency domain plot of a communications signal s(t).

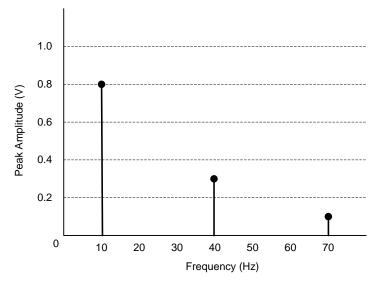


- a) What is the bandwidth of the signal s(t)? (½ mark)
- \_\_\_\_
- b) What is the frequency of the signal s(t)? (½ mark)
- c) Write a time domain equation for the signal s(t)? (1 mark)

s(t) =

d) If using signal s(t), two bits of information can be sent in one period, what is the maximum data rate? (1 mark)

## **Question 2** [1.5 marks]

The following diagram shows part of a signal which modulates data using Binary Phase Shift Keying. The vertical dashed lines show the transitions between each bit. Complete the boxes to show the data transmitted.

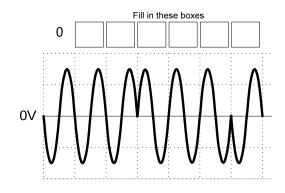

SIIT ITS 323

#### Question 3 [1 mark]

Consider a communications link with a signal-to-noise ratio of 63. What bandwidth would be required to transmit at the maximum theoretical data rate of 3Mb/s?

#### Question 4 [2 marks]


Assume you are using the free space loss equation to design a wireless link from one building to another (separated by 1km). The wireless receiver has a fixed receiver power threshold.

$$\frac{P_t}{P_r} = \frac{(4\pi d)^2}{G_t G_r \lambda^2} \text{ where } G = \frac{4\pi A}{\lambda^2}$$

After initial testing, although you have line-of-sight, you determine the received signal is two weak to communicate between buildings. List two approaches you can use to improve your design to a stronger link between buildings.

## **Question 5** [1.5 marks]

If the Non-Return-to-Zero Invert on ones (NRZI) encoding scheme is used, complete the bit pattern that the following signal represents. (That is, fill in the boxes).

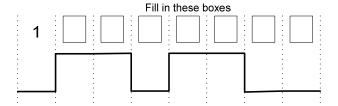

#### **Question 6** [1 mark]

a) What signalling rate is needed to send data at 1Mb/s if two signal elements represent 1 data bit?

| Answer:       |  |  |
|---------------|--|--|
| A XII S W CI. |  |  |

b) True or false: Although optical fibre provides much higher data rates than copper twisted pairs, the distance that can be transmitted of a single optical fibre length is shorter than copper twisted pair.

True / False